


## @ a glance

The Multiprotocol Industrial SMS Delivery Center is composed of a high-availability Embedded Industrial PC (Fanless, SSD, #2 Ethernet Port) and a pair of industrial GSM/GPRS/EDGE/3G/4G modems that supports two SIMs of commercial operators, in order to guarantee redundancy in sending SMS messages.

The system includes self-diagnosis functions, software redundancy broker (active/passive) and a back-up battery able to guarantee two hours of autonomy in case of power failure.

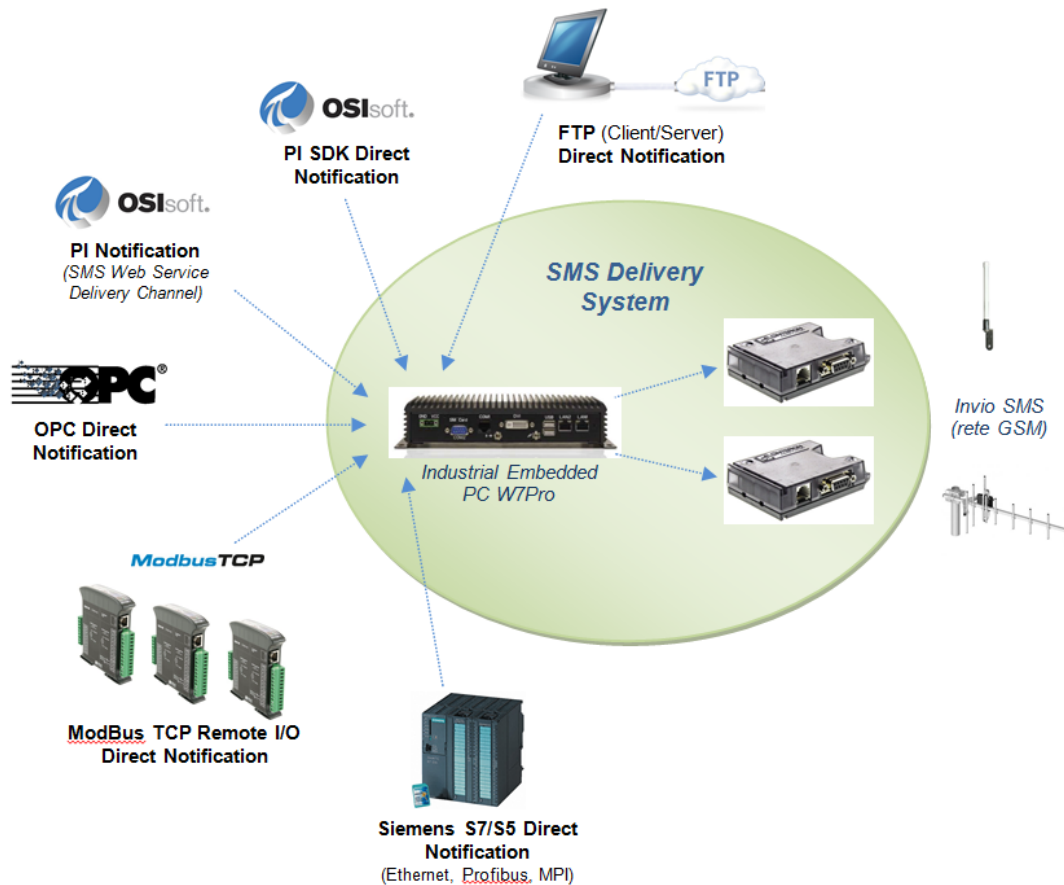

### Several interfaces to trigger the notification

- PI System (Notifications Delivery channel)
- PI System Direct (PI SDK)
- Web-Service
- OPC DA Client (DCS/SCADA)
- Direct digital I/O
- Direct Siemens PLC S7/S5
- Direct Ftp file transfer
- Remote ACK

### Easy to configure

- User Friendly HMI
- MS Excel Configuration File
- PI EF/AF

Go to the website

